


All Outback's Satellite 135 Changeover

S1 / S2


1. Push your Menu button on the left of the monitor
2. Push down arrow until you reach Service menu- push enter
3. Push down until you see SBAS Satellite- push Enter
4. Push up or down until you reach Satellite #135- push enter.
5. Wait for the GPS to pick up the new Signal.

S3

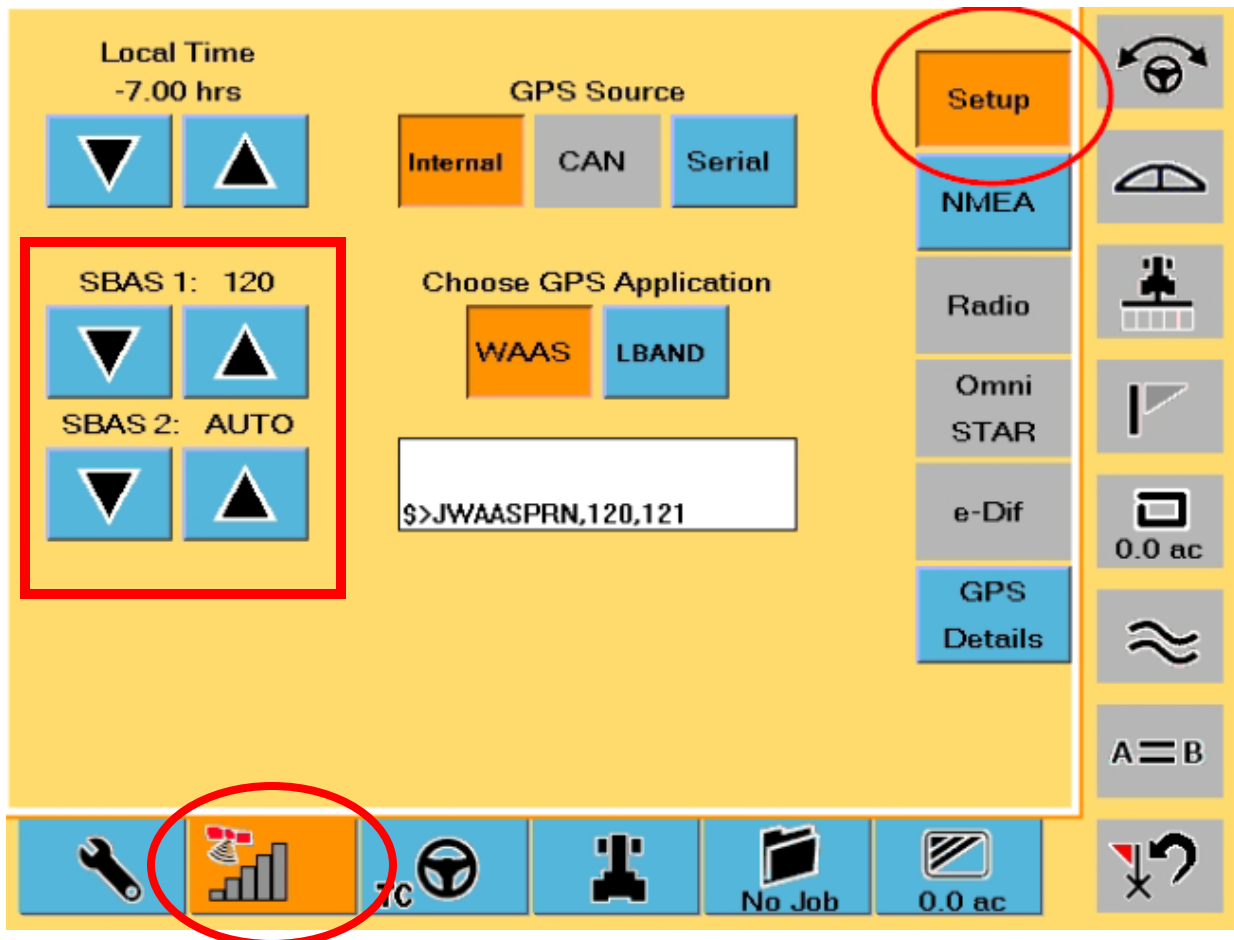


1. Press the GPS signal Bars on the bottom of the page.
2. Press Setup
3. Push the up or down arrows on SBAS 1 and SBAS 2 to show 135. If it will not let you select both to 135, make sure SBAS 1 is on 135.
4. Wait for the new satellite to lock on

STS

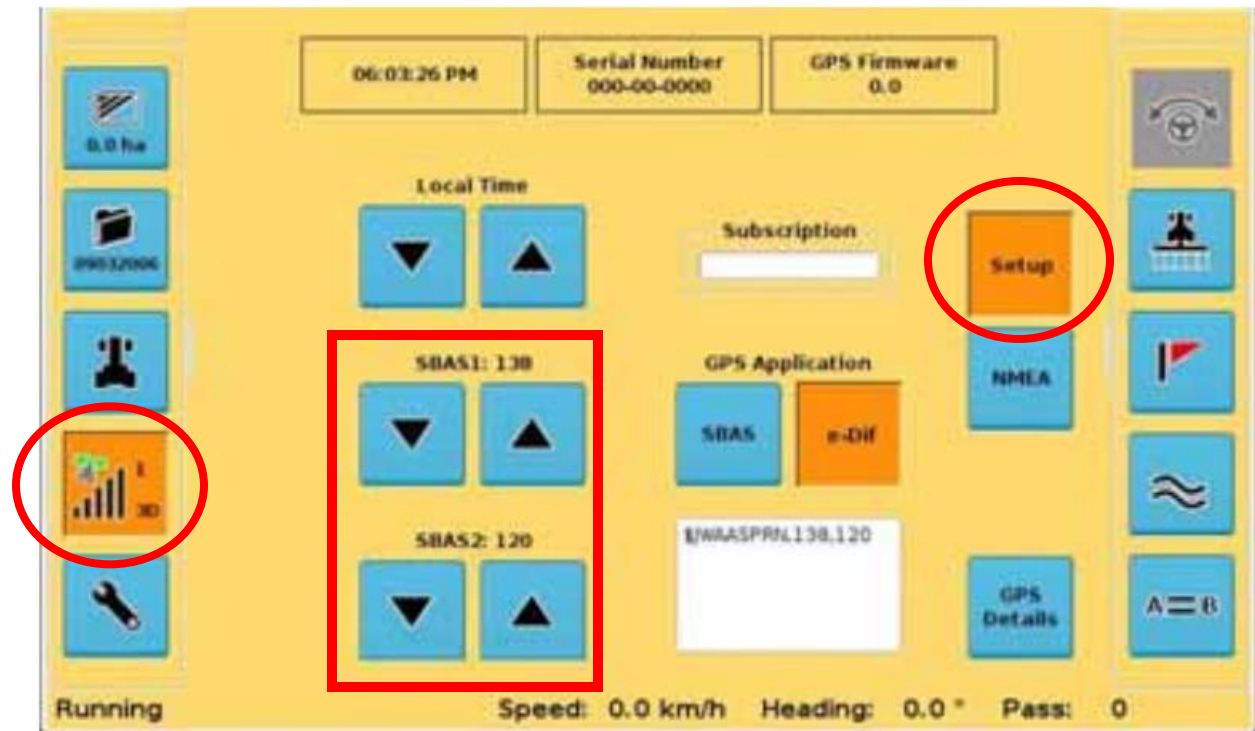


1. Push the GPS signal bars on the left side of the screen
2. Push Setup on the right hand side.
3. Push up or down to change SBAS 1 and SBAS 2 to Satellite #135. If it will not let you select both to 135, make sure SBAS 1 is on 135.
4. Wait for the new signal to lock on.

STX

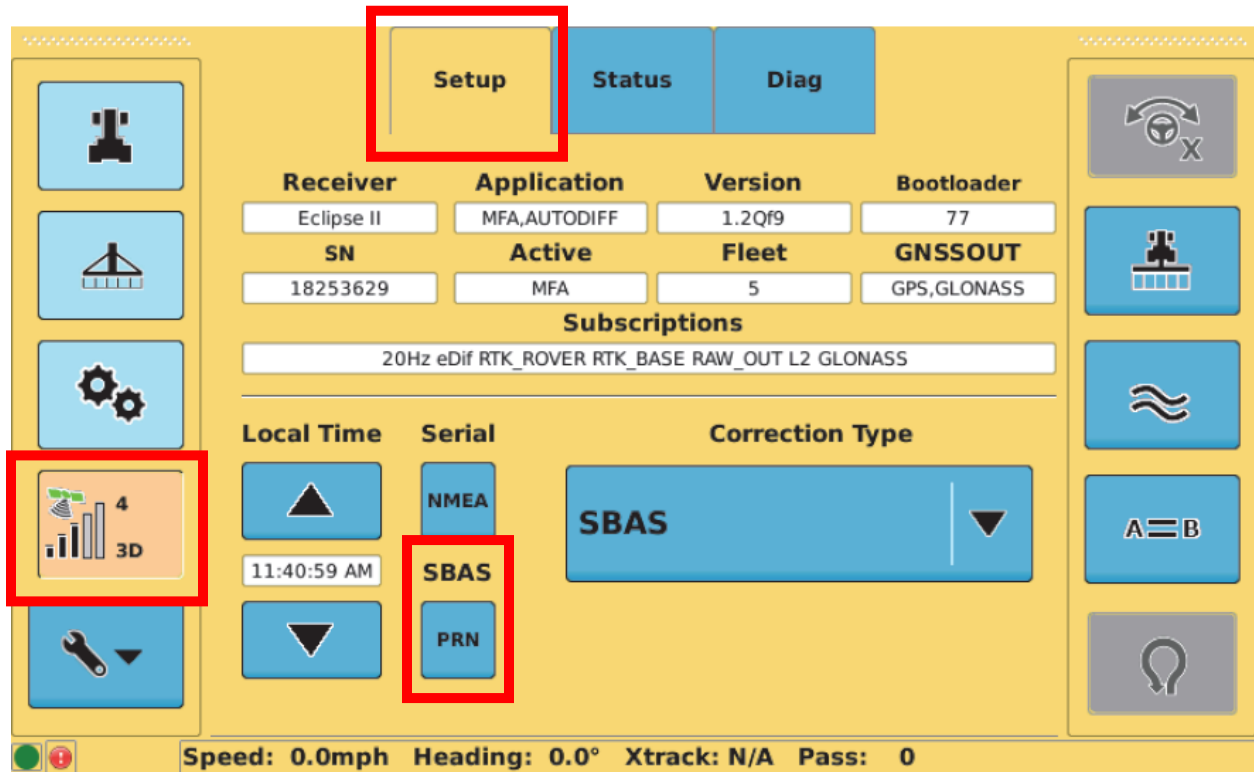

1. Push the Satellite signal bars on the left.
2. Push Setup on top then push PRN close to the bottom left.
3. Change SBAS 1, SBAS 2, and SBAS 3 to 135. If it will not let you select all to 135, make sure SBAS 1 is on 135.
4. Wait for the new signal to lock on.

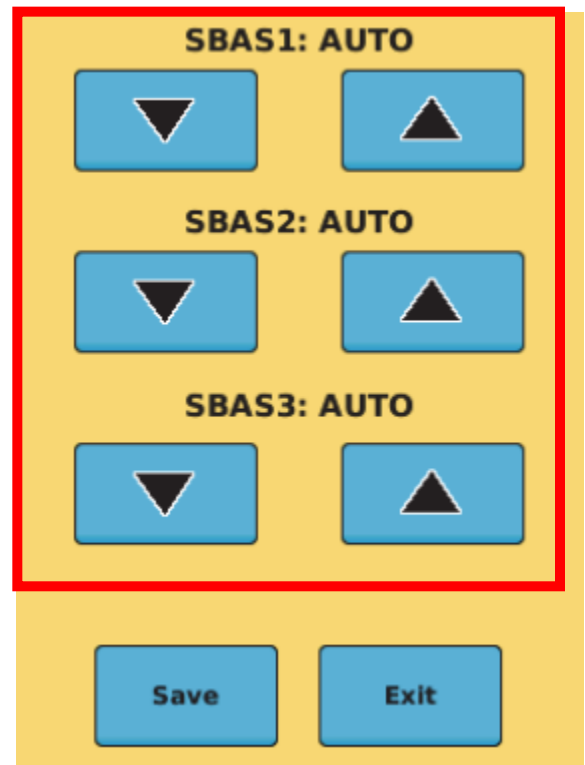

MAX / Rebel



1. Click Menu on the bottom or right hand side.
2. Click Settings – GPS Settings – SBAS Settings
3. Change SBAS 1, SBAS 2, and SBAS 3 to 135. If it will not let you select all to 135, make sure SBAS 1 is on 135.
4. Wait for the new Signal to lock on.